




TRN - SERIES SUBMERSIBLE - AERATOR

PERFORMANCE CURVE

MODEL	AIR INLET BORE	HP	KW	RPM	SOLIDS DIA	LIQUID	SG.	VISCOSITY	TEMP.
80TRN412-62	3" / 80mm	16	12	1733	0.591"/15mm	Water	1.0	1.123 cSt.	68°F
MIXING AREA	MAX. DEPTH	PHASE	VOLTAGE	AMPERAGE	HZ	STARTING METHOD	INS. CLASS		
1217 ft ² / 113 m ²	19.7 ft / 6 m	3	208-230 / 460	xxx-42.8 / 21.4	60	Star - Delta	F		
CURVE No.	DATE	PHASE	VOLTAGE	AMPERAGE	HZ	STARTING METHOD	INS. CLASS		
-	-	-	-	-	-	-	-		

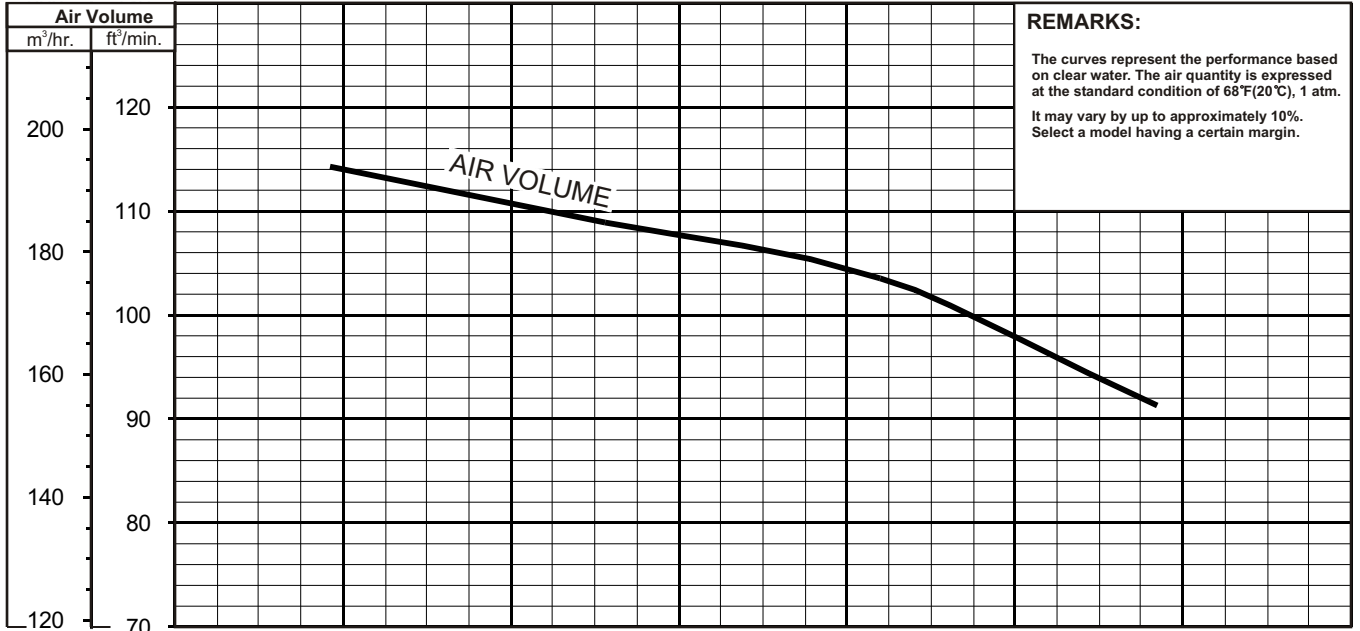

REMARKS:
The curves represent the performance based on clear water. The air quantity is expressed at the standard condition of 68°F(20°C), 1 atm. It may vary by up to approximately 10%. Select a model having a certain margin.

