




TRN - SERIES SUBMERSIBLE - AERATOR

PERFORMANCE CURVE

MODEL	AIR INLET BORE	HP	KW	RPM	SOLIDS DIA	LIQUID	SG.	VISCOSITY	TEMP.
100TRN424-64	4" / 100mm	32	24	1750	0.866"/22mm	Water	1.0	1.123 cSt.	68°F
MIXING AREA	MAX. DEPTH	PHASE	VOLTAGE	AMPERAGE	HZ	STARTING METHOD	INS. CLASS		
1777 ft ² / 165 m ²	19.7 ft / 6 m	3	460	44	60	Star - Delta	F		
CURVE No.	DATE	PHASE	VOLTAGE	AMPERAGE	HZ	STARTING METHOD	INS. CLASS		
-	-	-	-	-	-	-	-		

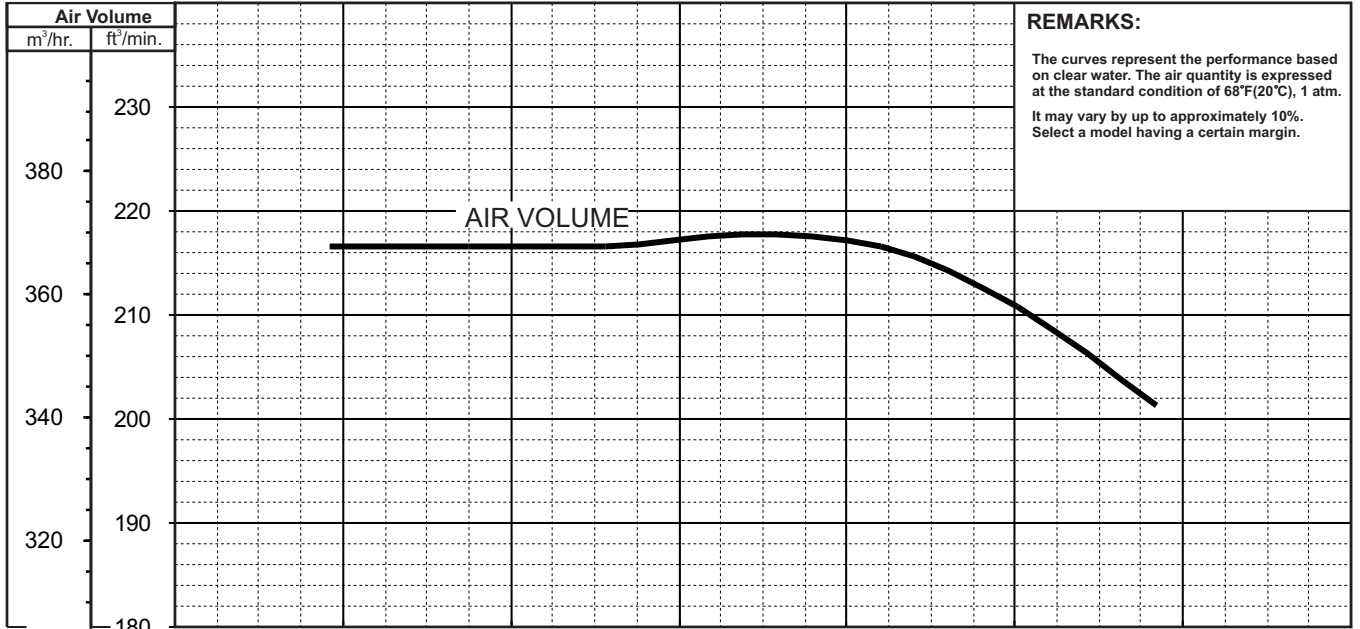

REMARKS:
The curves represent the performance based on clear water. The air quantity is expressed at the standard condition of 68°F(20°C), 1 atm. It may vary by up to approximately 10%. Select a model having a certain margin.

